
WOODWORKS[™] ACGI Cube System Continuous Cube 2




Continous Cube 2 (CC2) come in a variety of cell sizes, wood thicknesses and depths. Depending on project requirements, Cube panels can be factory or field-cut to size. Fixture cut-outs can be factory cut, but are typically cut to field conditions.

Continous Cube 2 (CC2) uses a 3/4" wooden grid for suspension. Perimeter conditions may require reveals to be placed between the panels and the structure. If the cubes are used in an island or floating configuration, vertical wood trim around the perimeter for both radius and straight profiles are available in matching or complimentary wood species and finishes.

CEILING & WALL SOLUTIONS

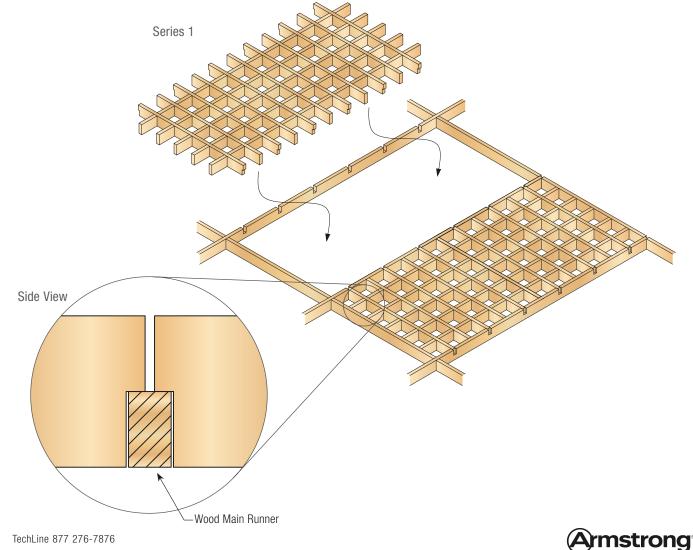

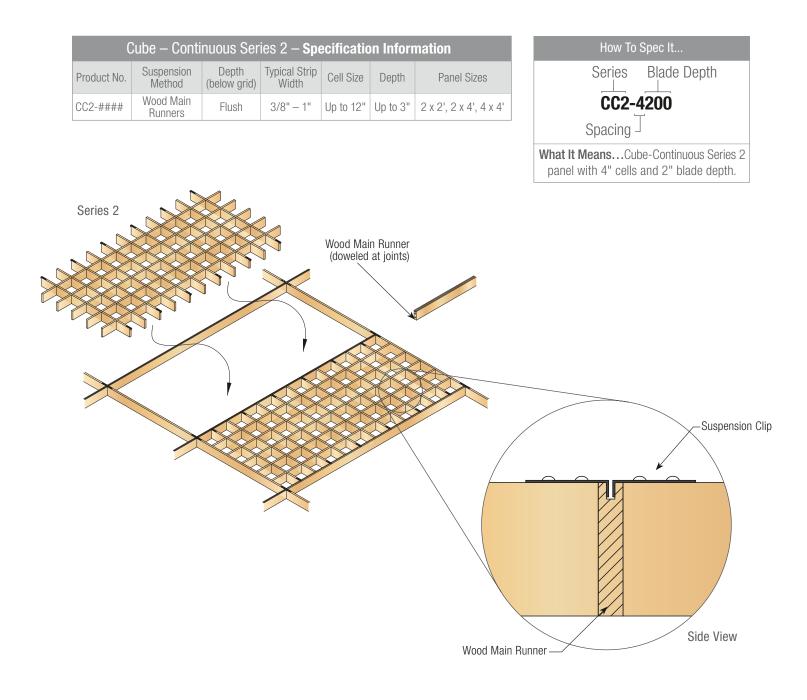

LEED[®] CREDIT

Depending upon product it may contribute to LEED credits. Contact us for more information.

SPECIES + STAINS

Continuous Cube 2 is available in solid and wood veneers to meet design requirements. Continuous Cube 2 can be finished in any of our standard finish options or custom finishes. Please see Wood Species + Stain Catalog. Contact us for more information.

FIRE RATING

Solid Wood – Class C: ASTM E84 surface burning characteristics. Class B available with fire rated treatment. Veneer Wood (Non-Perforated) – Class A: ASTM E84 surface burning characteristics.

DELIVERY, STORAGE & HANDLING (FOR INTERIOR APPLICATION ONLY)

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors, and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

Details at armstrongceilings.com/warranty

TechLine / 1 877 276-7876 armstrongceilings.com/woodworks BPCS-6811-422

LEED® is a registered trademark of the U.S. Green Building Council; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates @ 2022 AWI Licensing LLC

