



Micro-Grille





ACGI Micro-Grille series are an elegant solution for ceilings and walls. The panels offer a standard blade thickness of $\frac{3}{16}$ " and 1" depth. Panels can extend to eight feet in length.

Micro-Grille Series 1 [MG1] are placed on notched wood backers and can be used where air flow is required.

Micro-Grille Series 2 [MG2] is constructed as an encapsulated panel allowing for acoustical insulation and simple installation.

MG1—End View

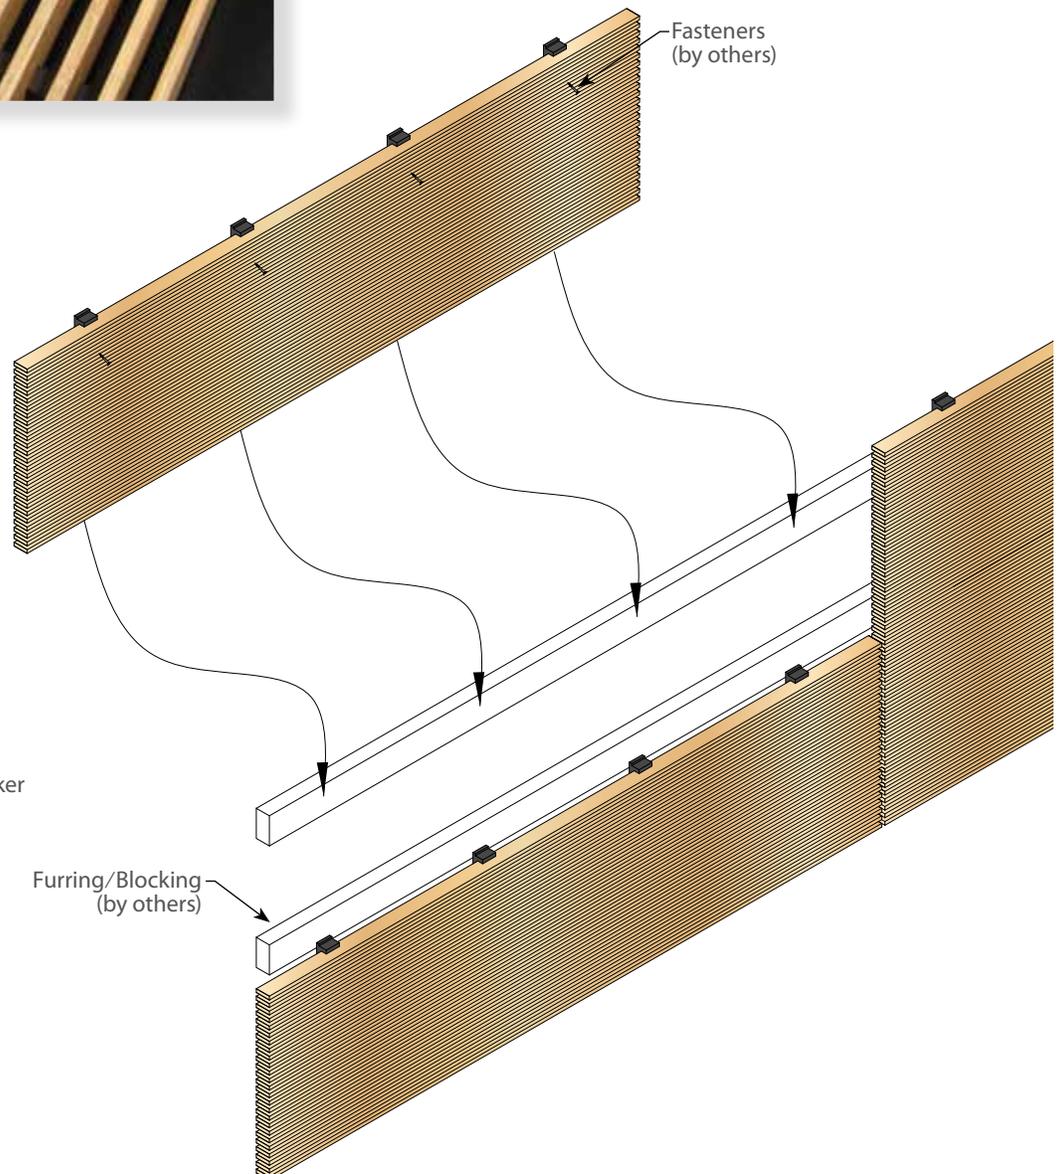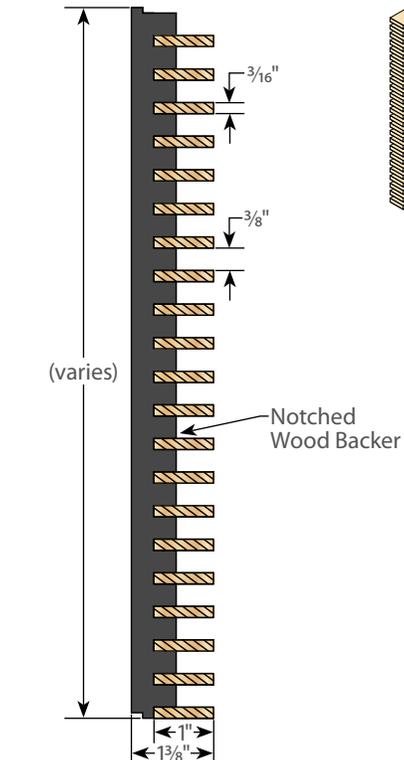

Micro-Grille Series 1 & 2 — Specification Information

Product No.	Suspension System	Encapsulated Insulation	Blades per ft.	Depth	Typical Thickness
MG1-####	Notched Wood Backer	No	Varies	1"	3/16"
MG2-####	Notched Wood Backer	Optional	Varies	1"	3/16"

How To Spec It...



Series Height

MG1-21100

Blades per ft.

What It Means... Micro-Grille Series 1 with 21 blades/ft. and 1" blade depth.

MG2—End View

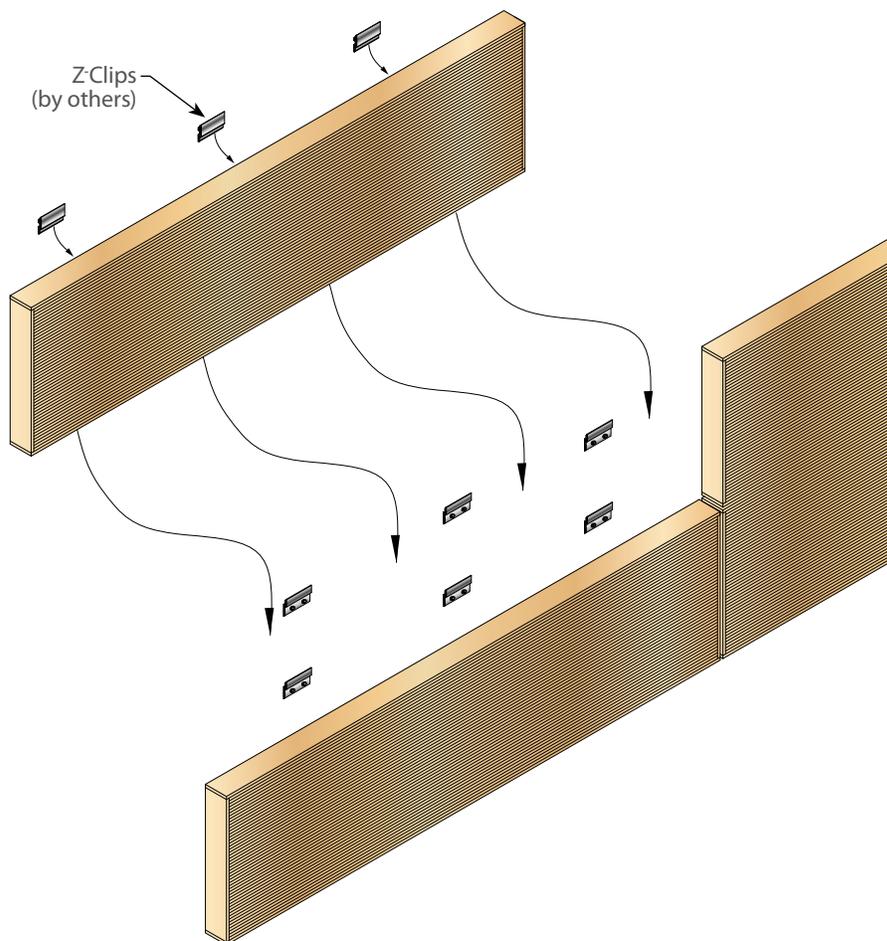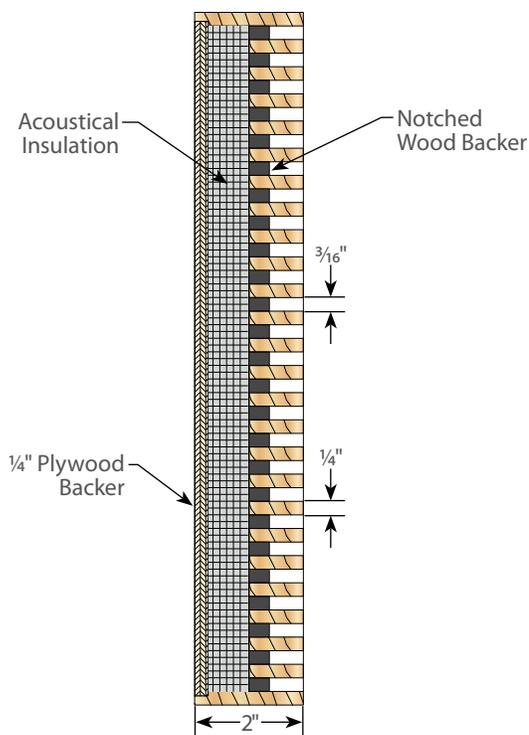

LEED CREDIT

MR 4.1, MR 4.2, MR 7, EQ 4.4

WOOD SPECIES

Micro-Grille panels are available in a large variety of wood veneers to meet design requirements.

FINISHES

Micro-Grille panels can be finished in any of our standard finish options or custom finishes.

FIRE RATING

Soild wood finshes and veneer finishes and cores can be provided with a Class A fire rating [ASTM-E84].

DELIVERY, STORAGE & HANDLING

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.