
# BAFFLE SYSTEMS

# Tremolo



Tremolo™ [TR1] is a tapered wood baffle that furnishes a stunning and impressive appearance. Each member suspends individually by HD T-Grid. An integral light fixture can be incorporated. Tremolo™ baffles typically have a depth of  $8\frac{1}{2}$ ", and can be manufactured in a wide variety of veneer.

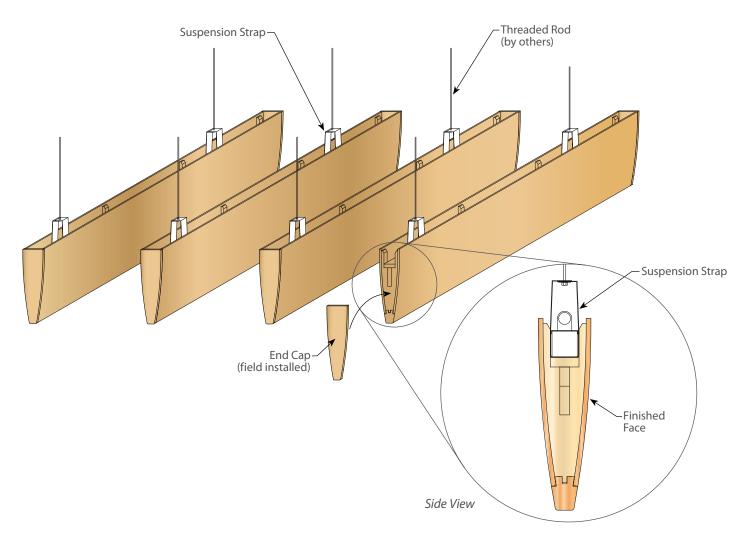

Tremolo Baffle — Specification Information					
Product No.	Profile	Suspension Method	Baffles (per ft.)	Depth	Typical Thickness
TR1-###	Tapered	Independent Suspension	1-3	8½" and up	3"







### **LEED CREDIT**

MR 4.1, MR 4.2, MR 7, EQ 4.4

# **WOOD SPECIES**

Tremolo™ is available in a large variety of wood veneers to meet design requirements.

#### FINISHES

Tremolo™ can be finished in any of our standard finish options or custom finishes.

## **FIRE RATING**

Our veneered products can be provided with a Class A rated core [ASTM-E84].

# **DELIVERY, STORAGE & HANDLING**

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

#### **WARRANTY**

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.



© 2012 Architectural Components Group, Inc. All Rights Reserved. Information provided is accurate at time of printing. ACGI reserves the right to modify any materials without further notification. All product applications are suggestion only. Always conform with local building codes and safety conditions. ACGI does not accept responsibility for the misuse or improper installation of products. Visit ACGIwood.com for more details. Printed in U.S.A.