




Series 1 & 2



ACGI Baffle Systems consist of wood members with a depth greater than 3½" and mounted to notched wood backers. Wood members can be made from solid wood or wood veneer over either MDF, particle board, or fire-rated foam. Baffle panels suspend with HD T-Grid or attach to walls with screws through the backer. Various wood member thicknesses and spacing can be specified to meet project requirements while the size and the number of baffles can vary depending on design criteria. In addition to our two standard profiles, custom profiles can be manufactured to a specific design.

Baffle Series 1 [WB1] have four square sides.

Baffle Series 2 [WB2] baffles have a radiused bottom face.

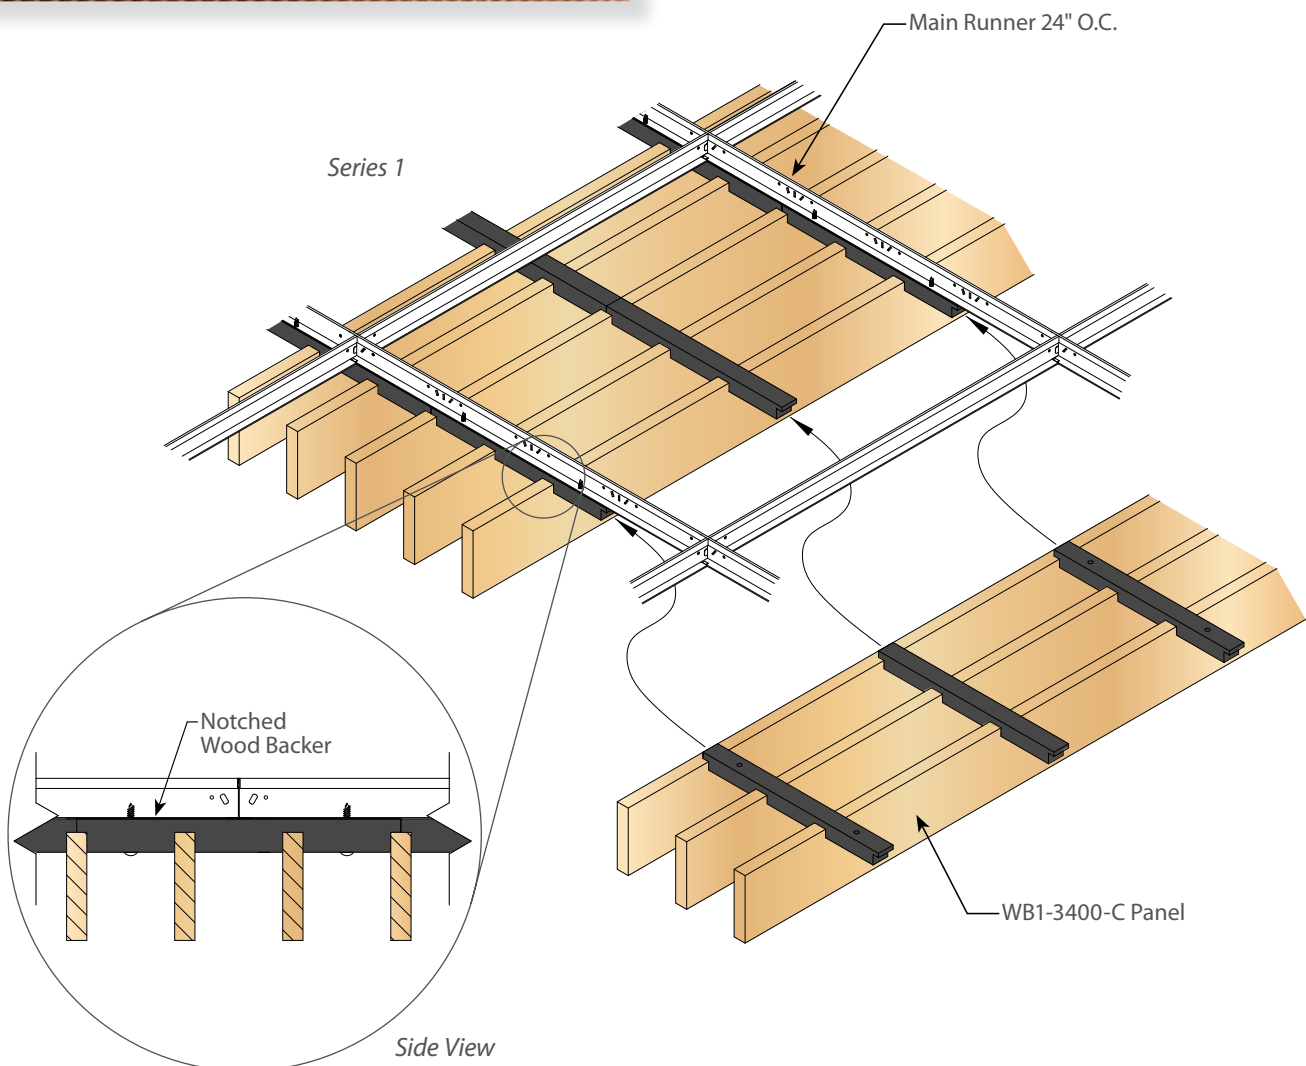


Baffle Series 1 & 2 — Specification Information


Product No.	Profile	Suspension Method	Blades (per ft.)	Depth*	Typical Thickness
WB1-####-#	Square	Notched Wood Backer	1-8	3½" and up	¾"-2"
WB2-####-#	Radiused	Notched Wood Backer	1-8	3½" and up	¾"-2"

*For wood member depths less than 3½", please see our line of Grille products.

Baffle Series 1 (square)

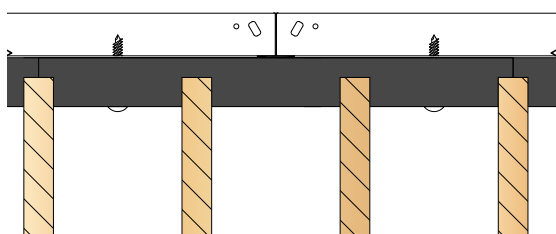

Baffle Series 2 (radiused)

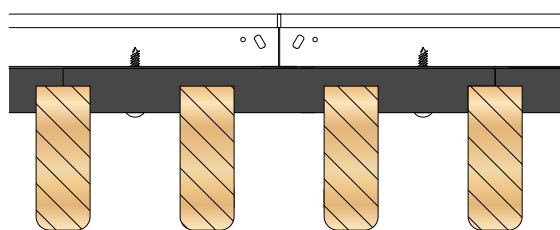

How To Spec It...

Series — Baffle Thickness ●
WB1-3400-C
 Baffles per ft. — Depth

What It Means... Baffle Series 1 with 3 baffles/foot, 4" depth and ¾" thickness.

Thickness Reference

A	½"
B	⅝"
● C	¾"
D	⅞"
E	1"
F	1⅛"
G	1¼"
H	1⅜"
I	1½"
J	1⅝"
K	1¾"
L	1⅞"
M	2"
N	2⅛"
O	2¼"
P	2⅜"

LEED CREDIT

MR 4.1, MR 4.2, MR 7, EQ 4.4

WOOD SPECIES

Baffle blades are available in a large variety of wood veneers to meet design requirements.

FINISHES

Baffle blades can be finished in any of our standard finish options or custom finishes.

FIRE RATING

Our veneered products can be provided with a Class A rated core [ASTM-E84].

DELIVERY, STORAGE & HANDLING

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.