




Open Series 5



ACGI Linear Systems feature two basic series: Linear Open (LO) and Linear Closed (LC). Both systems are available in solid wood or wood veneer depending on plank size and design requirements.

Linear Open Series 5 [LO5] combines the appeal of linear panels with the convenience of lay-in suspension. Supported on all four sides, LO5 quickly installs into standard 2' x 2' or 2' x 4' HD T-Grid without the use of additional hardware. Typical reveal is $\frac{3}{4}$ "; however, reveal options are only limited by the designer's preferences. To block additional light, an optional factory-attached black fiber-felt strip is also available.

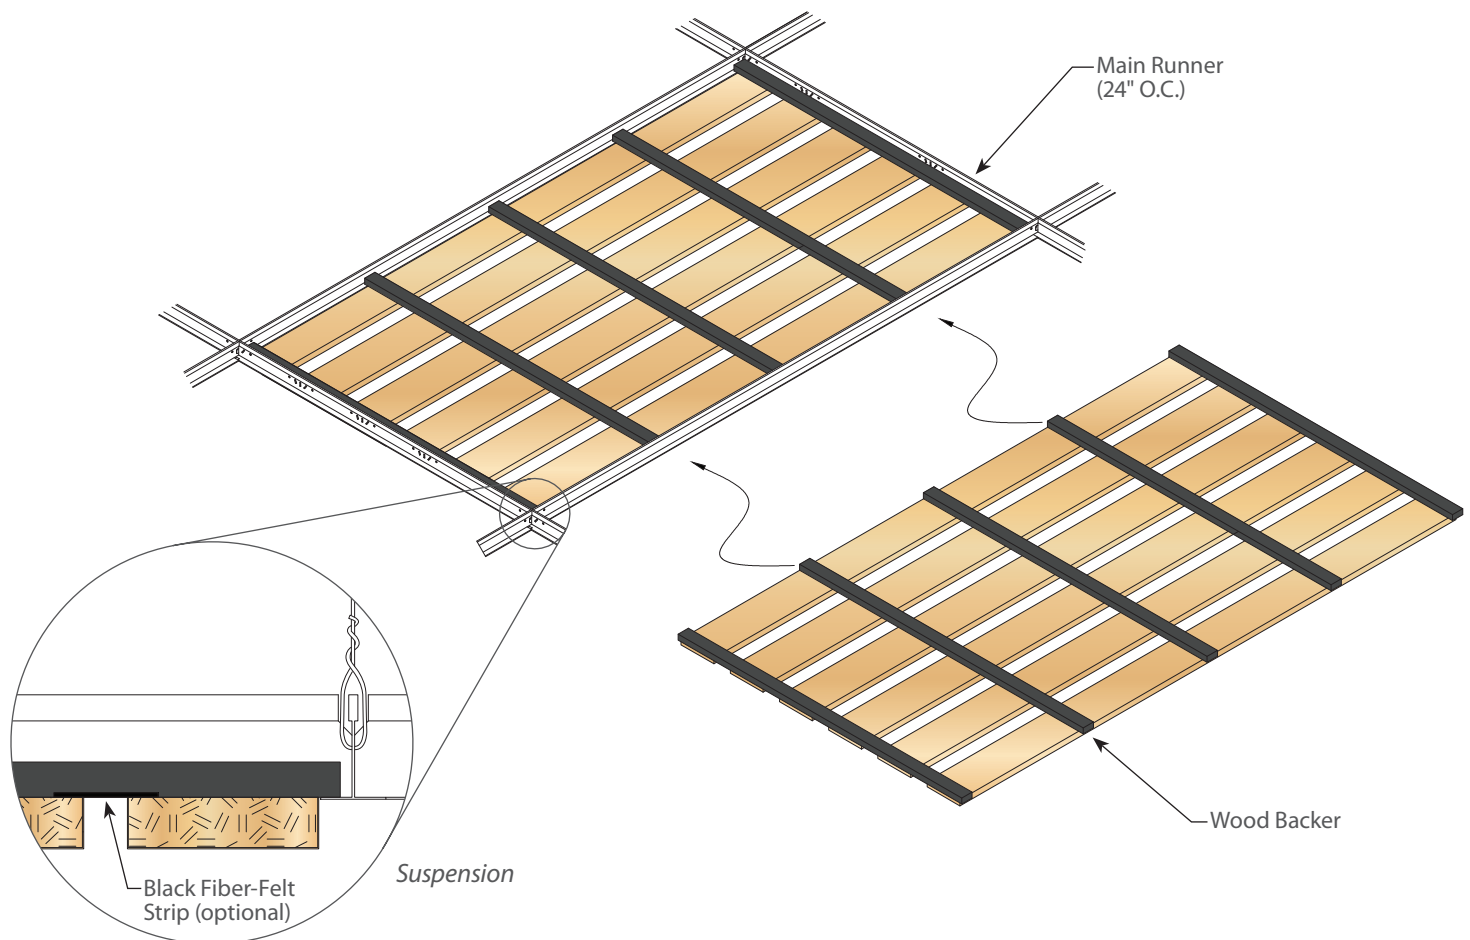

Linear Open Series 5 — Specification Information


Product No.	Suspension	Typical Reveal	Solid Wood Width	Veneer Width	Typical Thickness
L05-####-C	$1\frac{5}{16}$ " HD T-Grid	$\frac{3}{4}$ "	Up to $5\frac{1}{4}$ "	Up to 24"	$\frac{3}{4}$ "

How To Spec It...

Series
L05-375-C
 Thickness
 Width

What It Means... Linear Open Series 5 planks, $3\frac{3}{4}$ " wide and $\frac{3}{4}$ " thick.

Side View

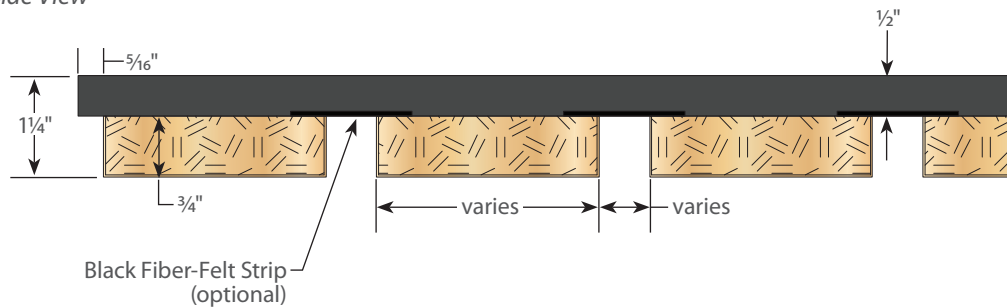

ACOUSTICS

NRC of 0.20 (E 400 mounting, panels only)
 NRC of 0.60 (E 400 mounting, 1" acoustical blanket)
 NRC of 0.70 (E 400 mounting, 2" acoustical blanket)

The Linear Open System allows sound waves to pass between the planks into the plenum. The NRC performance is controlled by installing 1" or 2" acoustic insulation. Most acoustic insulation blankets or mats have black coating to conceal the reveal. An optional non-woven black felt can be factory applied to create a visual barrier in the reveal.

LEED® CREDIT

MR 4.1, MR 4.2, MR 7, EQ 4.4

SPECIES + STAINS

For this product ACGI can source any commercially available solid wood, veneer or thermally-fused laminate and apply any standard, color-matched or custom finish. Contact us for details.

FIRE RATING

Solid wood finishes and both veneer finishes and cores can be provided with a Class A fire rating [ASTM-E84].

DELIVERY, STORAGE & HANDLING

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.

